

SPECIFICATION SHEET


BPL-500-FG

• Underwater Lights

• Fiber Glass

Fixture Specifications:

Housing: Fiber Glass	Wiring: Fixture is prewired with a 15ft 18-2 waterproof cord.
Finish: BLK-Black	Mounting: U-Shaped Bracket
Socket: GU5.3 socket	Electrical Notes: A 12V transformer is required. Options are available from Best Pro Lighting.com Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 8V-21V
Lamp: 12V, MR16 halogen bulb 20W standard, 50W Max. LED lamps available in 3W/6W/9W, with 2700K-warm white color temperature.	Warranty: Limited five (5) year warranty on fixture housing and against manufacture's defects.

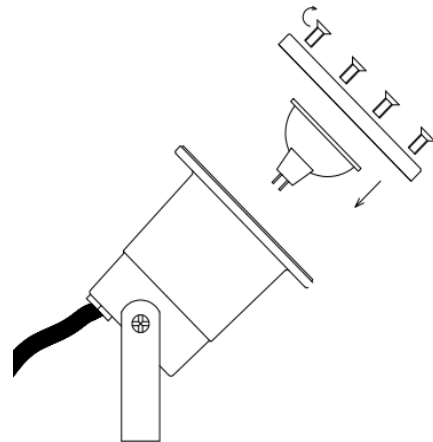

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WMR16LED	3	38°	270	2700K	50000	20 Watt
6WMR16LED	6	38°	540	2700K	50000	35 Watt
9WMR16LED	9	38°	810	2700K	50000	50 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
MR16 20W	20	36°		2700K	2000
MR16 35W	35	36°		2700K	2000
MR16 50W	50	36°		2700K	2000

For additional Lamps and accessories, visit www.bestprolighting.com

