

# SPECIFICATION SHEET

## BPL-105


• Directional Light

• Aluminum

### Fixture Specifications:

- Housing:** Die-cast aluminum.
- Swivel:** Die-cast aluminum swivel, with ½ NPT hub on bottom.
- Finish:** Polyester UV powder coated, available in **BLK-Black, RST-Rust**
- Socket:** GU5.3 socket
- Lamp:** 12V, MR16 halogen bulb 20W standard, 50W Max. LED lamps available in 3W/6W/9W, with 2700K-warm white color temperature.

- Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord. Silicone filled wire nut BPL-80 available from BestProLighting.com Wire nuts sold separately.
- Mounting Spike:** Black 8½" ABS spike with ½" NPT male hub on top
- Electrical Notes:** A 12V transformer is required. Options are available from BestProLighting.com Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.
- Warranty:** Limited five (5) year warranty on fixture housing and on stem against manufacture's defects.

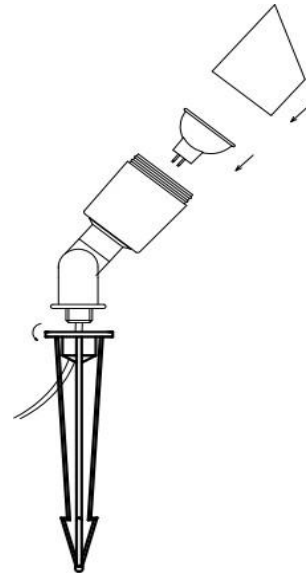

#### AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WMR16LED	3	45°	270	2700K	50000	20 Watt
6WMR16LED	6	45°	540	2700K	50000	35 Watt
9WMR16LED	9	45°	810	2700K	50000	50 Watt

#### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
MR16 20W	20	36°		2700K	2000
MR16 35W	35	36°		2700K	2000
MR16 50W	50	36°		2700K	2000

For additional lamps and accessories, visit [bestprolighting.com](http://bestprolighting.com)

