

SPECIFICATION SHEET

BPL - 304

• Area Lights

• Aluminum

Fixture Specifications:

Housing: Die-cast aluminum.

Stem: Die-cast aluminum stem, with ½ NPT hub on bottom.

Finish: Polyester UV powder coated, available in **BLK-Black, RST-Rust**

Socket: G4 Bi-Pin socket


Lamp: 12V, JC Bi-Pin bulb 20W standard, 20W Max
LED lamps available in 3W, with
2700K-warm white color temperature.

Wiring: Fixture is prewired with a 3ft 18-2 direct burial cord. Silicone filled wire nut BPL-80 available from BestProLighting.com
Wire nuts sold separately.

Mounting Spike: Black 8½" ABS spike with ½" NPT male hub on top

Electrical Notes: A 12V transformer is required. Options are available from BestProLighting.com
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

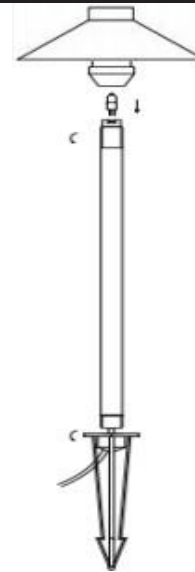

AVAILABLE LED LAMPS

LAMP NUMBER	BEAM		LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
	WATTS	SPREAD				
LED3WG412V	3	360°	270	2700K	30000	20 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
J C10W	10	360°	75	2700K	2000
JC20W	20	360°	190	2700K	2000
JC35W	35	360°	265	2700K	2000
JC50W	50	360°	400	2700K	2000

For additional Lamps and accessories, visit bestprolighting.com

