

# SPECIFICATION SHEET

## BPL - 400

• Step/ Deck Lights

• Aluminum

### Fixture Specifications:

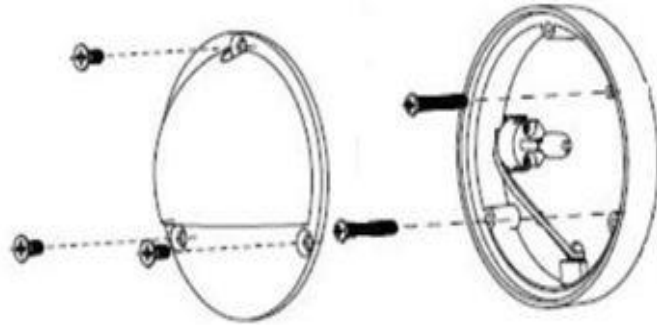
**Housing:** Die-cast aluminum.

**Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord.

**Finish:** Polyester UV powder coated, available in **BLK-Black, RST-Rust**
**Electrical Notes:** A 12V transformer is required. Options are available from BestProLighting.com  
 Voltage range for 12V halogen lamps are 11V-12.5V  
 Voltage range for LED lamps are 8V-21V.  
 Proper grease/lubricant is suggested on threaded parts during installation process.

**Socket:** G4 Bi-Pin socket

**Lamp:** 12V, JC Bi-Pin bulb 20W standard, 20W Max  
 LED lamps available in 3W, with 2700K-warm white color temperature.

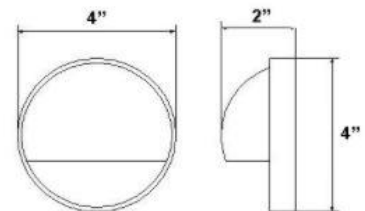
**Warranty:** Limited five (5) year warranty on fixture housing and stem against manufacture's defects.


#### AVAILABLE LED LAMPS

| LAMP NUMBER | BEAM  |        | LUMEN | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------|-------|--------|-------|---------------|-------------|--------------------|
|             | WATTS | SPREAD |       |               |             |                    |
| LED3WG412V  | 3     | 360°   | 270   | 2700K         | 30000       | 20 Watt            |

#### AVAILABLE HALOGEN LAMPS

| LAMP NUMBER | WATTS | BEAM   |       | COLOR & TEMP. | RATED HOURS |
|-------------|-------|--------|-------|---------------|-------------|
|             |       | SPREAD | LUMEN |               |             |
| JC10W       | 10    | 360°   | 75    | 2700K         | 2000        |
| JC20W       | 20    | 360°   | 190   | 2700K         | 2000        |
| JC35W       | 35    | 360°   | 265   | 2700K         | 2000        |
| JC50W       | 50    | 360°   | 400   | 2700K         | 2000        |


 For additional lamps and accessories, visit [bestprolighting.com](http://bestprolighting.com)